




Characteristics:
Antivibratory adaptor.


Eigenschaften:
Schwingungsgedämpfte Aufnahmen.

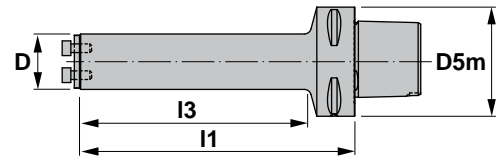



J..



Reference Bezeichnung	D5m	D	l3	l1	
PSC63-J25	63	25	103	132	1,300
PSC63-J32	63	32	129	159	1,700
PSC63-J40	63	40	169	198	2,300
PSC63-J50	63	50	212	239	3,300
PSC63-J60	63	60	263	287	5,900

Reference Bezeichnung			Nm
PSC63-J25	1924	5025	2.0
PSC63-J32	1925	5003	3.0
PSC63-J40	1926	5004	3.5
PSC63-J50	1928	5005	4.0
PSC63-J60	1928	5005	4.0

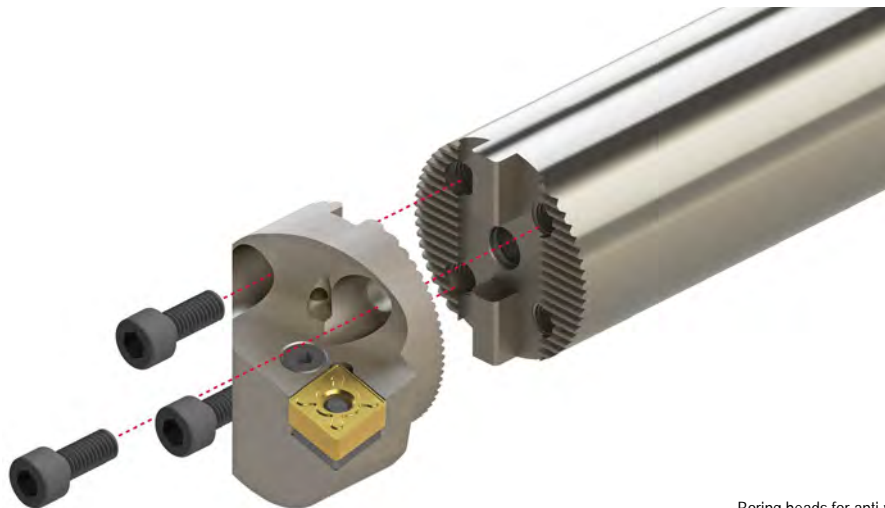

Boring heads for anti-vibration bars.  A238-245
Bohrköpfe für Schwingungsgedämpfte Bohrstanen.

MTUN 93°-N 	PCLN 95°-N 	PDUN 93°-N 	PWLN 95°-N 
SCLC 95°-N 	SDUC 93°-N 	STFC 90°-N 	SXFN 90°-N 