


**CLAMPING HEADS FOR SINGLE-SPINDLE  
TÊTES DE SERRAGE POUR MONOBROCHES  
SPANNKÖPFE FÜR EINSPIEDLER**

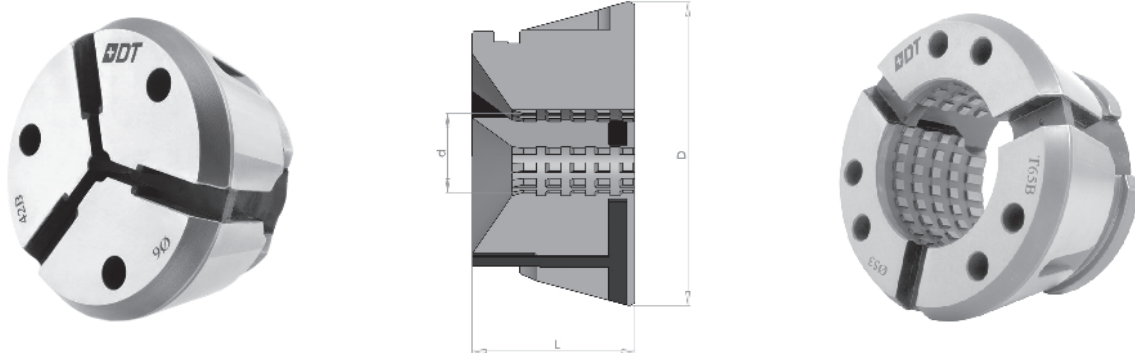

A = Alésage / Ausführung der Bohrung / Bore			
L	lisse	glatt	smooth
R	rainures circulaires	mit Querrillen	with radial grooves
S	striée	mit Längs- und Querrillen	with radial and longitudinal grooves
W	pince douce	weich/ausdrehbar	emergency collet

Type/Typ	Ref./Art.	L	D	●			◆			■		
				A	by/par/stg		A	by/par/stg		A	by/par/stg	
32	32L	44	57,7	4-32	L	1	7-27	L	1	7-22	L	1
	32R	44	57,7	8-32	R	1	8-27	R	1	8-22	R	1
	32S	44	57,7	11-32	S	1						
	32EM	44	57,7	-32	W	1						

Type/Typ	Ref./Art.	L	Ref./Art.	L	D	●			◆			■		
						A	by/par/stg		A	by/par/stg		A	by/par/stg	
42	42L	42			79,3	4-42	L	0,5	7-38	L	1	7-30	L	1
	42R	42	42BR	47	79,3	8-42	R	0,5	8-38	R	1	8-30	R	1
	42S	42	42BS	47	79,3	11-42	S	0,5						
	42EM	42			79,3	4-42	W	1						

pour Index MS 42 on peut utiliser la réf. 42B / for Index MS 42 it can be used 42B / für Index MS 42 kann man die Ref. 42B benutzen

Type/Typ	Ref./Art.	L	D	●			◆			■		
				A	by/par/stg		A	by/par/stg		A	by/par/stg	
52	52L	46	79,3	4-52	L	0,5	7-45	L	1	7-36	L	1
	52R	46	79,3	8-52	R	0,5	8-45	R	1	8-36	R	1
	52S	46	79,3	11-52	S	0,5						
	52EM	46	79,3	4-52	W	1						

Type/Typ	Ref./Art.	L	Ref./Art.	L	D	●			◆			■		
						A	by/par/stg		A	by/par/stg		A	by/par/stg	
65	65L	53			99,5	4-65	L	0,5	7-56	L	1	7-46	L	1
	65R	53	65BR	58	99,5	8-65	R	0,5	8-56	R	1	8-46	R	1
	65S	53	65BS	58	99,5	11-65	S	0,5						
	65EM	53			99,5	4-65	W	1						

pour Index MS 52 on peut utiliser la réf. 65B / for Index MS 52 it can be used 65B / für Index MS 52 kann man die Ref. 65B benutzen

Type/Typ	Ref./Art.	L	D	●			◆			■		
				A	by/par/stg		A	by/par/stg		A	by/par/stg	
80	80L	53	114,5	4-80	L	1	7-68	L	1	7-56	L	1
	80R	53	114,5	8-80	R	1	8-68	R	1	8-56	R	1
	80S	53	114,5	11-80	S	1						
	80EM	53	114,5	4-80	W	1						

Cap. of tightening / cap. de serrage / Spannkapazität: +/- 0.30 dimensions in mm / dimensions en mm / Maße in mm